




TECHNICAL DATA SHEET VERTICALLY SLIDING FIRE GATES GGG EI 60

Technical data sheets serve to determine the basic space requirements of vertically sliding fire gates. Other dimensions or atypical demands can be solved upon request.

GGG EI 60

HYDRAULIC SYSTEM

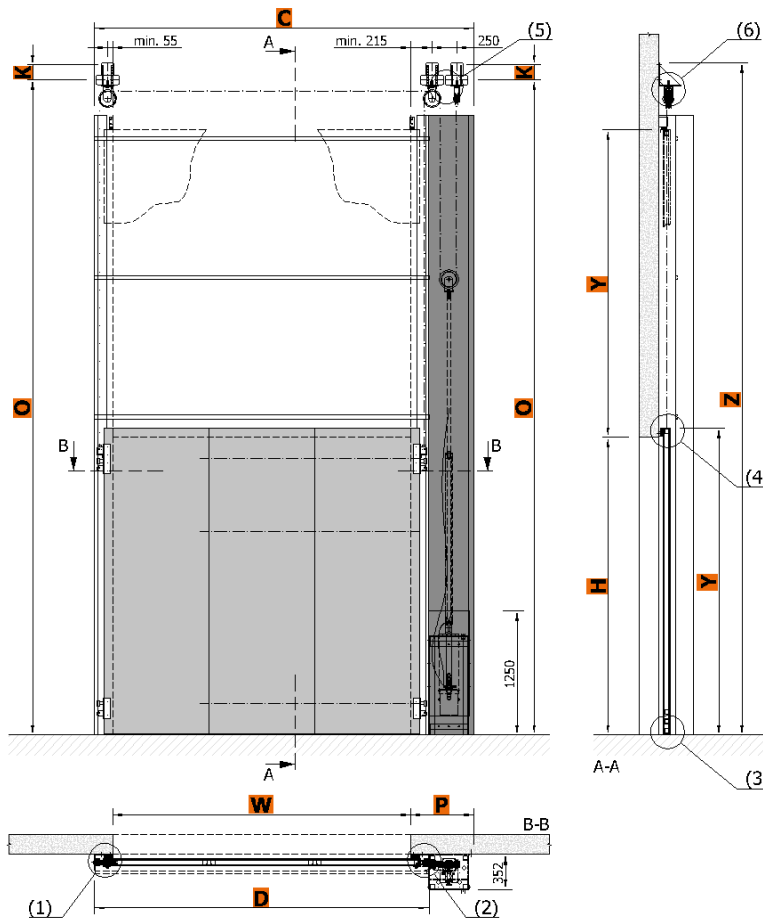


Control options:
- motor
- hand pump

Minimum height $H_{min} = 2000$ mm. Smaller dimensions has to be consulted with producer.


W	opening width [mm]	H	opening height [mm]
Y	gate range	=	$H + 90$ mm
D	external pitch of guide tracks	=	$W + 2x \text{ min. } 185$ mm (+ 2x 17 mm bolts)
C	overall width	=	$W + \text{ min. } 202$ mm + P
A	vertical part of steel structure	=	$O - 60$ mm
K	pitch of bracket anchor points	=	$(m \leq 1000 \text{ kg}) \Rightarrow 155$ mm; $(m > 1000 \text{ kg}) \Rightarrow 230$ mm
O	anchoring axis of pulley	=	$H + Y + \text{ min. } 485$ mm
P	cover of hydraulic cylinder	=	640 mm
Z	overall height	=	$(m \leq 1000 \text{ kg}) \Rightarrow O_1 + 175$; $(m > 1000 \text{ kg}) \Rightarrow O_1 + 250$ mm
E	edge of steel structure	=	$P - 80$ mm

Average weight of gate leaf = 50 kg/m²

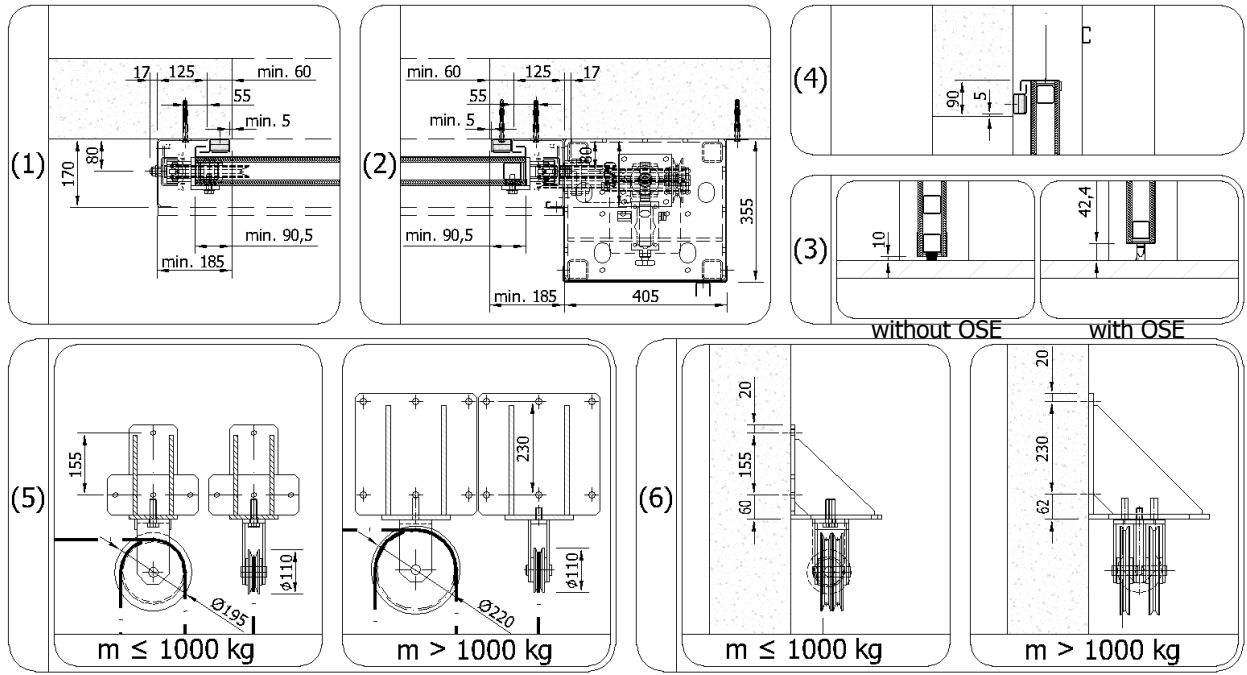

Minimum required dimensions of steel structure

m > 1000 kg
m ≤ 1000 kg

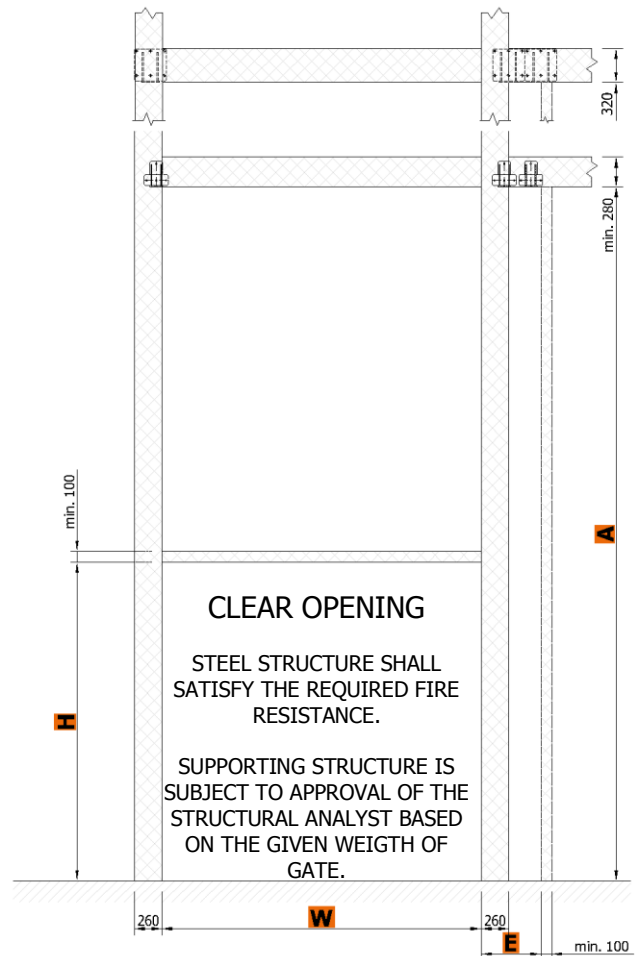

Construction readiness of the opening is secured by the customer according to the requirements of the contractor and depending on the type of jamb and lintel of the opening.
Anchor brackets can be fixed with anchor bolts (concrete, solid brick), or to anchor targets with bolts through wall (foam silicate, gas silicate or breeze (hollow) blocks), or to prepared steel structure with appropriate fire resistance (plasterboard wall, sandwich panels etc.). It is necessary to respect the flatness of the wall and the floor with a tolerance of max. 3 mm/m.
Technical changes reserved.

TECHNICAL DATA SHEET GGS EI 60 HYDRAULIC SYSTEM

