

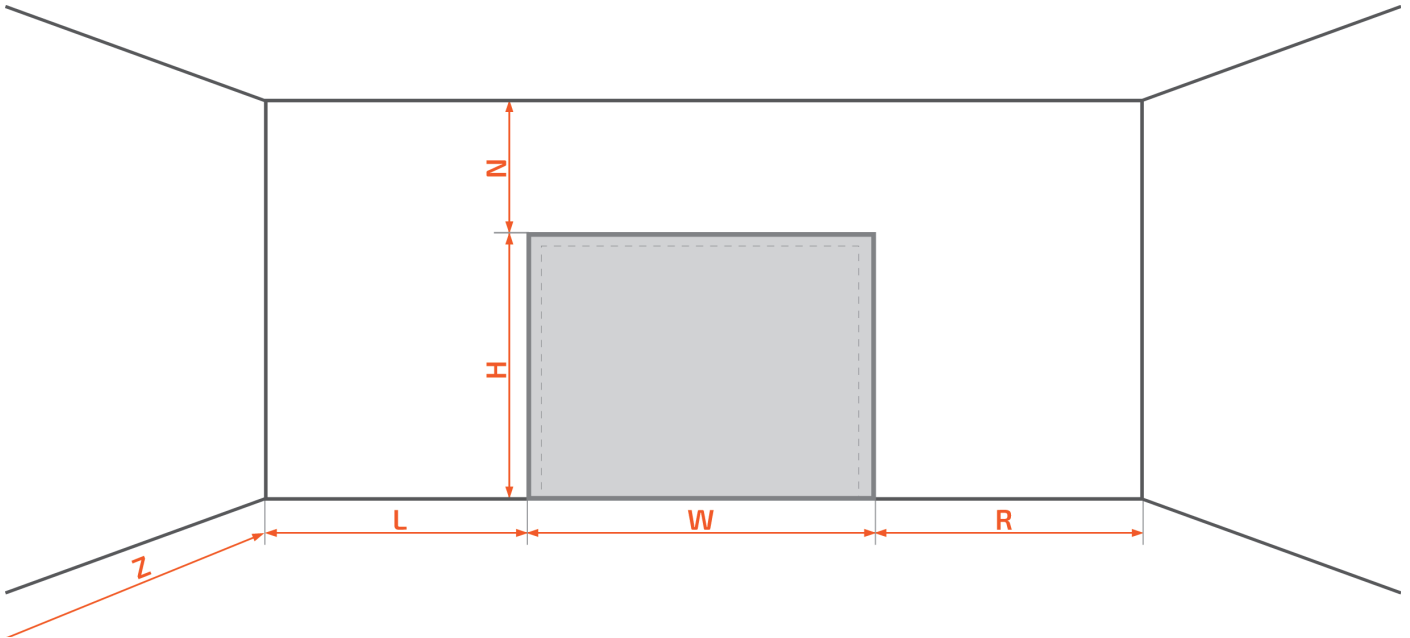
ORDER FORM FOR FIRE GATES SGS

CUSTOMER

PROJECT NAME

EXPECTED DATE OF DELIVERY

PROJECT/OFFER NUMBER



GATE NR.

DIMENSIONS

W	opening width	mm
H	opening height	mm
L	space on the left	mm
R	space on the right	mm
N	lintel	mm
Z	space in front of the wall	mm
	other	

HAND SKETCH

(use in case of more complex conditions, where the standard rough drawing is not sufficient)

NOTE Files for download (catalogues, data sheets, installation manuals, technical manuals...)

ORDER FORM FOR FIRE GATES SGS

CUSTOMER

PROJECT NAME

EXPECTED DATE OF DELIVERY

PROJECT/OFFER NUMBER

NECESSARY ITEMS TO FILL IN




OPENING DIMENSIONS

opening dimensions	opening width	mm
	opening height	mm
dimensions according to the dims. sheet		

FIRE RESISTANCE

EI	EW
smoke sealing Sa/S200	
sound insulation 28/29 dB	



TYPE OF SLIDING GATES

single leaf SGS (1+0)	pcs	left	
		right	
double leaf SGS (1+1)	pcs	symmetrical	
		asymmetrical	
		mm left	
		mm right	
telescopic SGS-T (2+0)	pcs	left	
other	right		



CONTROL

electromagnetic brake with counterweight	motor with control box
electromagnet with track slope (maximum dimension 4m ²)	other
counterweight/motor position	left
	right

ANCHORING

wall	ceiling	other
		

STOP PROFILE

standard (counterweight in stop profile)	flat (counterweight in open position)	other
		

SURFACE

BASIC (gate leaf in selected surface finish, other components galvanized)
PLUS (other components in RAL)

SURFACE FINISH

galvanized
RAL standard
RAL other
INOX AISI 304 SB+P (consult with producer)

NOTE request for drawing of steel structure

OPTIONAL ACCESSORIES





GATE LOCK

PASSAGE DOOR

standard dimensions	900 x 2000 mm	pcs
atypical dimensions	mm	pcs
without threshold (standard)		
with threshold		

COVERING OF RAIL

OPENING ORIENTATION OF PASSAGE DOOR

Pd1 - right, out of the opening	Pd3 - right, to the opening
	
Pd2 - left, to the opening	Pd4 - left, out of the opening
	

FITTINGS OF PASSAGE DOOR

roller lock HOBES (standard)
panic lock NEMEF 1769
standard lock FAB
other

DOOR CLOSER

FAB DC 340 (standard)
built-in ITS 96

FRAME + BOTTOM SEALING

rubber (frame + bottom) sealing
other

WINDOW

horizontal 500 x 300 mm	pcs
vertical 300 x 500 mm	pcs

CONTROL DEVICE

(these optional accessories only for brake/magnet control)

without control device	
control device Slidetronic COMPACT	
control device	battery module
Blocktronic	

DETECTION/WARNING LIGHTS

(only for selected control device Slidetronic II, HD or COMPACT)

smoke detector + base	pcs
heat detector + base	pcs
combined detector + base	pcs
warning light (flash + siren)	pcs

OTHER

SIGNATURE, STAMP

DATE